


| type number | diameter min.-max. (mm) | cover tray * | | | | max. number of clamps next to each other ** | | | | | | 🔥 |
|--------------------|-------------------------------|----------------|-----|-----|-------------|---|-----|-----|-----|-----|-----|----|
| | | height KZI, KL | | | | width KZI, KL | | | | | | |
| | | 60 | 85 | 110 | NKZI 100 | 150 | 200 | 300 | 400 | 500 | 600 | |
| PKC1 1198_F | 6-12 | yes | yes | yes | yes | 8 | 12 | 18 | 24 | 30 | 37 | 🔥🔥 |
| PKC1 1199_F | 7-16 | yes | yes | yes | yes | 7 | 9 | 14 | 19 | 24 | 29 | 🔥🔥 |
| PKC1 1200_F | 10-19 | no | yes | yes | yes | 5 | 7 | 11 | 15 | 19 | 23 | 🔥🔥 |
| PKC1 1201_F | 14-23 | no | yes | yes | yes | 5 | 6 | 10 | 14 | 17 | 21 | 🔥🔥 |
| PKC1 1202_F | 20-26 | no | yes | yes | yes | 4 | 5 | 8 | 11 | 14 | 17 | 🔥🔥 |
| PKC1 1203_F | 24-30 | no | yes | yes | yes | 3 | 5 | 7 | 10 | 12 | 15 | 🔥🔥 |
| PKC1 1204_F | 25-34 | no | yes | yes | yes | 3 | 4 | 6 | 9 | 11 | 14 | 🔥🔥 |
| PKC1 1205_F | 29-38 | no | yes | yes | yes | 3 | 4 | 6 | 8 | 10 | 13 | 🔥🔥 |
| PKC1 1206_F | 32-43 | no | no | yes | yes | 2 | 3 | 5 | 7 | 9 | 11 | 🔥🔥 |
| PKC1 1207_F | 42-46 | no | no | yes | no | 2 | 3 | 5 | 7 | 8 | 10 | 🔥🔥 |
| PKC1 1208_F | 44-50 | no | no | yes | no | 2 | 3 | 5 | 6 | 8 | 10 | 🔥🔥 |
| PKC1 1209_F | 50-54 | no | no | yes | no | 2 | 3 | 4 | 6 | 7 | 9 | 🔥🔥 |
| PKC1 1210_F | 51-58 | no | no | no | no | 2 | 2 | 4 | 5 | 7 | 8 | 🔥🔥 |
| PKC1 1211_F | 55-63 | no | no | no | no | 1 | 2 | 4 | 5 | 6 | 8 | 🔥🔥 |
| PKC1 1212_F | 59-69 | no | no | no | no | 1 | 2 | 3 | 5 | 6 | 7 | 🔥🔥 |



product description: Clamps are used to fasten a cable to a rung of a cable ladder, supporting profile for NPKV cable clamps or NP supporting profile. The basic surface treatment with which clamps are delivered makes it possible to use them even in harsh weather environments.

* The chart shows how cable trays can be covered when using a clamp with the maximum cable diameter.

** The values show the maximum number of cable clamps of one size installed side by side in relation to the width of the ladder (tray). The number of cables installed is the same as the number of clamps. Max. diameter + 2 mm is the outer width of the clamp. The outer width of the clamp can be used to calculate the number of clamps when various sizes are required in a single tray.

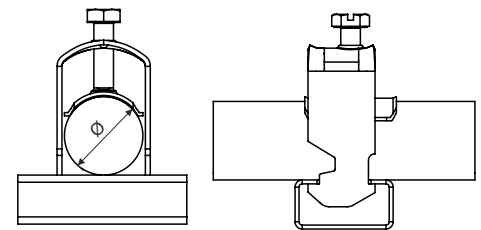

surface finish: F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

meets the requirements: ČSN EN 61537:02

sales amount: 1 pc

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

- 🔥 products are approved for standard constructions
- 🔥🔥 products are approved for non-standard constructions

