
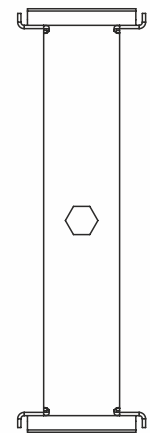
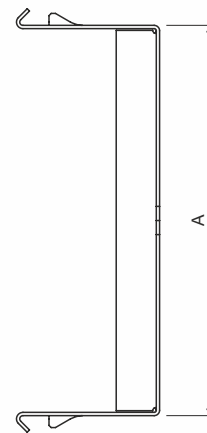


type number	A (mm)	weight (kg/pc)
ZVNE 50_S	30	0,10
ZVNE 50_F		0,11
ZVNE 62_S	42	0,11
ZVNE 62_F		0,12
ZVNE 75_S	55	0,12
ZVNE 75_F		0,14
ZVNE 100_S	80	0,14
ZVNE 100_F		0,16
ZVNE 125_S	105	0,16
ZVNE 125_F		0,18
ZVNE 150_S	130	0,18
ZVNE 150_F		0,21
ZVNE 200_S	180	0,22
ZVNE 200_F		0,24
ZVNE 250_S	230	0,27
ZVNE 250_F		0,30
ZVNE 300_S	280	0,31
ZVNE 300_F		0,34
ZVNE 400_S	380	0,39
ZVNE 400_F		0,43



product description:

The internal suspension is used to suspend the cable tray or cable ladder from the threaded rod.

The threaded rod is anchored to the hanger using an MN nut, which must be ordered separately. The dimension of the nut is chosen by the diameter of the threaded rod.

Fixing the outer hanger to the route is done with bent edges of the sidewalls of each other.

The hanger allows the installation of partition in the cable route.

Maximum load is 90 kg.

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount:

1 pc

meets the requirements:

ČSN EN 61537:02

storage:

ČSN EN 60721-3-1

