

type number: KSK 175_PO16

material: halogen-free material

color: orange RAL 2004

IP classification: IP 66

product description: The box includes a 5-pole ceramic terminal block with maintained

functionality during fires. It is fixed to the concrete using the

supplied screws.

This terminal block is designed for 5 conductors from 1.5 to 16 mm² in cross section. It is fixed to the concrete using the supplied

screws.

Cable use depends on the type of structure of which the boxes are a part. The data for types of cables (or for the lack of some limits) may be found in individual assemblies system with

maintained functionality in fire.

It is easy to insert cable, due to soft inputs with maintained protection IP 66. The entire box is made from halogen-free

material.

The cover is attached using the supplied stainless steel bolts.


sales amount: á 1 pc

certification: EN 60670-1


classification: ČSN 73 0895 P 90-R


DIN 4102-12 E 90 STN 92 0205 PS 90

storage: ČSN 64 0090

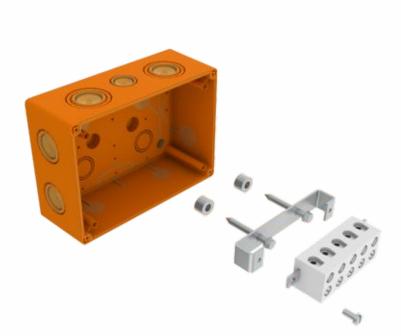









recycling codes:



wiring box



cover

cardboard



shrink film



terminal block holder

terminals